

# REGULAR MAINTENANCE



To be prepared



● Silicone grease








● Fluorine  
● Anti-corrosion spray



● Cotton swab (Recommend)

○ Apply Silicone grease or Anti-corrosion spray at red circled areas as below.

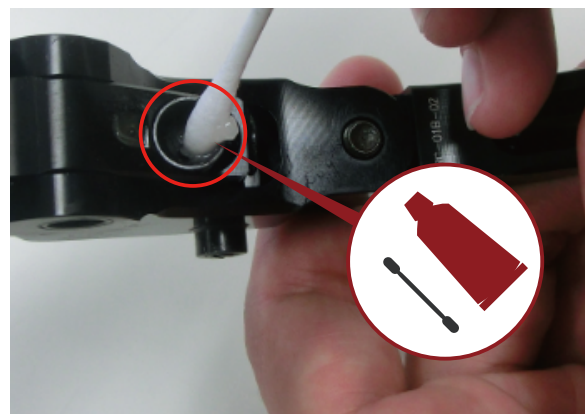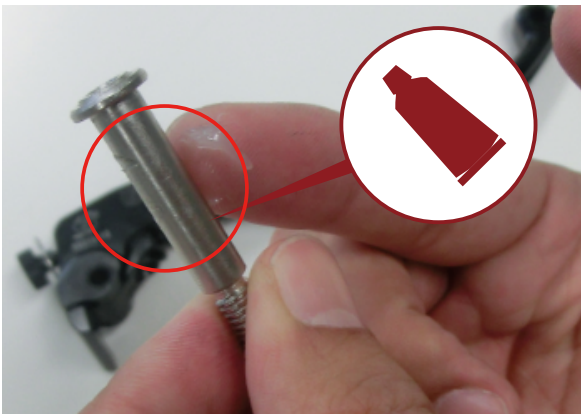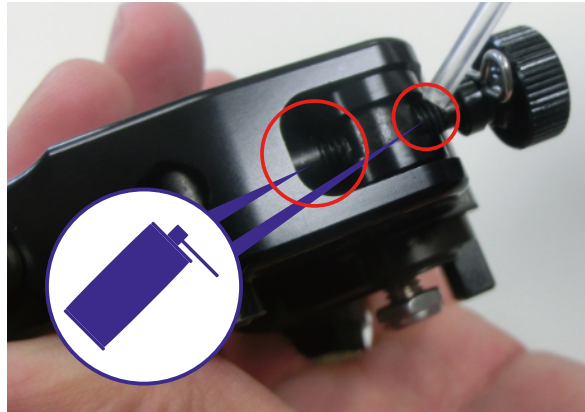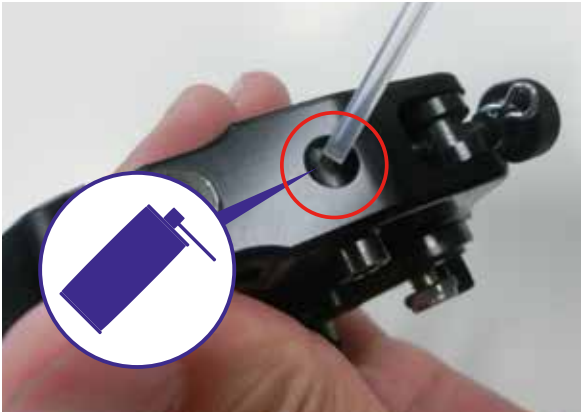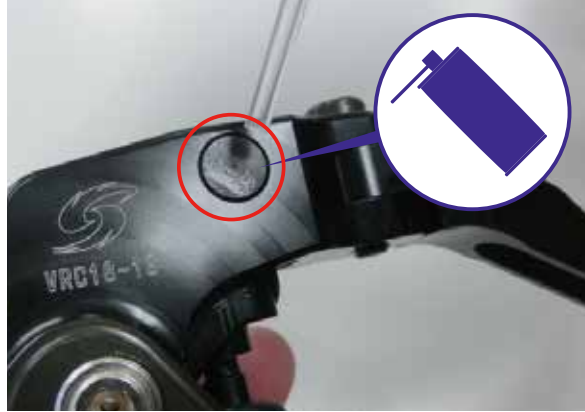

Remove the pivot pin and disassemble.